

568H是增强热塑性塑料用短切原丝。表面涂覆硅烷基浸润剂，适用于增强PA66、PA6。

568H适用挤出注射工艺，广泛应用于汽车工业、电子电器、日用品、体育用品等领域。

568H chopped strands for thermoplastics are coated with a silane-based sizing, compatible with PA66 and PA6 resins.

568H is designed for extrusion and injection molding processes, and is widely used in automotive industry, electrical & electronic, daily goods, and sporting goods.

### 产品特点

- ◎ 原丝集束性好、静电小、毛羽少、流动性好
- ◎ 优异的耐冷冻液性能
- ◎ 制品机械性能高

### Product Features

- ◎ Excellent strand integrity, low static, low fuzz, and good flowability
- ◎ Excellent glycol resistance
- ◎ Good mechanical properties

### 规格代号 Identification:

代号示例 Example	ECS10-03-568H
玻璃类型 Glass Type	E
短切原丝 Chopped Strands	CS
纤维直径(μm) Filament Diameter(μm)	10, 11, 13
短切长度(mm) Chop Length(mm)	3, 4, 5
浸润剂代号 Size Code	568H




### 技术指标 Technical Parameters

纤维直径 (%) Filament Diameter (%)	含水率 (%) Moisture Content (%)	可燃物含量 (%) Size Content (%)	短切长度 (mm) Chop length (mm)	短切率 (%) Choppability(%)
ISO 1888	ISO 3344	ISO 1887	Q/JS J0361	Q/JS J0362
± 10	≤ 0.05	0.45 ± 0.15	± 1.0	≥ 99

### 贮存 Storage

在没有特殊要求的情况下，玻璃纤维产品应贮存在干燥、凉爽的地方，防止受潮。建议保持室内温度平衡，最佳存储条件为温度-10°C~35°C,相对湿度≤80%。本产品可在12个月内使用最佳，使用前应保持在原包装内，为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上面的托盘。

Unless otherwise specified, the fiberglass products should be stored in a dry, cool and moisture-proof area. The fiberglass products should remain in their original package until prior to use. The room temperature and humidity should be always maintained at -10°C~35°C and ≤80% respectively. To ensure safety and avoid damage to the product, the pallets should not be stacked more than three layers high. When the pallets are stacked in 2 or 3 layers, special care should be taken to correctly and smoothly move the top pallet.

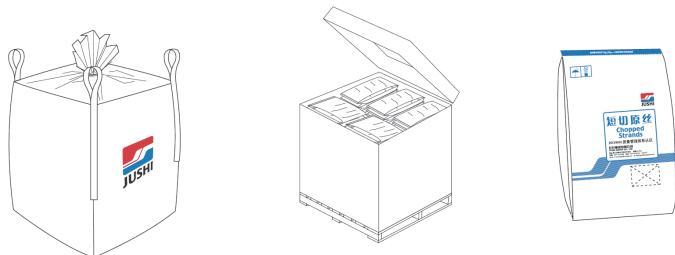

### 包装信息 Packaging

\* 采用集装袋包装、重型箱包装、编织袋包装;

例如:

集装袋可装900kg~1000kg; 编织袋可装15kg~25kg

The product can be packed in bulk bags, heavy-duty box, and composite plastic woven bags;

For example:

Bulk bags can hold 900kg-1000kg each;

Cardboard boxes and composite plastic woven bags can hold 15kg-25kg each.

#### 集装袋尺寸 Bulk bag

长度 Length mm (in)	1030 (40.5)
宽度 Width mm (in)	1030 (40.5)
高度 Height mm (in)	1000 (39.4)

#### 重型箱包装尺寸 heavy-duty box

长度 Length mm (in)	1120 (44)
宽度 Width mm (in)	1120 (44)
高度 Height mm (in)	1050 (41.3)

#### 编织袋尺寸 Composite plastic woven bag

长度 Length mm (in)	850 (33.5)
宽度 Width mm (in)	500 (19.7)
高度 Height mm (in)	120 (4.7)